

Not to Scale

HOLBROOK-ASSOCIATED

Prepared By:
Holbrook-Associated
35 Reservoir Park Drive
Rockland, MA 02370

Job Name:
Upton Apartments
Upton, MA

Scale: as noted	Project ID: 216889
Date:10/18/2023	Rep: AH / SS
Filename: Upton Apartments.AGI	
Drawn By:JHainey	

The Lighting Analysis, ezLayout, Energy Analysis and/or Visual Simulation ("Lighting Design") provided by Holbrook-Associated represent an anticipated prediction of lighting system performance based upon design parameters and information supplied by others. These design parameters and information provided by others have not been field verified by Holbrook-Associated and therefore actual measured results may vary from the actual field conditions. Holbrook-Associated recommends that design parameters and other information be field verified to reduce variation.

Holbrook-Associated neither warrants, either implied or stated with regard to actual measured light levels or energy consumption levels as compared to those illustrated by the Lighting Design. Holbrook-Associated neither warrants, either implied or stated, nor represents the appropriateness, completeness or suitability of the Lighting Design intent as compliant with any applicable regulatory code requirements with the exception of those specifically stated on drawings created and submitted by Holbrook-Associated. The Lighting design is issued, in whole or in part, as advisory documents for informational purposes and is not intended for construction nor as being part of a project's construction documentation package.

Filename: C:\Users\jholbrook\Documents\AGI32 - Designs\2023 Designs\Andrew Holbrook\Upton Apartments\Upton Apartments.AGI

Calculation Summary

Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min	Description	PtSpcLr	PtSpcTb	Meter Type
Site	Illuminance	Fc	0.39	13.7	0.0	N.A.	N.A.	Readings Taken @ 0'-0" AFG	10	10	Horizontal
Parking Lot	Illuminance	Fc	2.67	13.7	0.2	13.35	68.50				

Luminaire Schedule


All quotes/orders generated from this layout must be forwarded to the Local Rep Agency

Symbol	Qty	Tag	Label	Arrangement	LLF	Description	BUG Rating
	5	A2	ALEDM2T	Single	1.000	ALEDM2T, 90W	B3-U0-G2
	1	A3	ALEDM3T	Single	1.000	ALEDM3T, 90W	B1-U0-G2
	6	A4	ALEDM4T	Single	1.000	ALEDM4T, 90W	B1-U0-G3
	9	S1	SLIM17FAFC100	Single	1.000	SLIM17FAFC100_5K at 0_ CCT Setting	B3-U0-G2


Expanded Luminaire Location Summary

LumNo	Tag	X	Y	MTG HT	Orient	Tilt
1	A2	143.447	504.764	20	107.65	0
2	A2	234.87	541.934	20	127.349	0
3	A2	295.267	599.893	20	115.757	0
4	A2	390.609	599.267	20	72.072	0
5	A2	459.719	553	20	0	0
6	A3	565.852	519.783	20	270	0
7	A4	462.591	457	20	0	0
10	A4	791.508	273.414	20	180	0
14	A4	392	266.67	20	0	0
15	A4	480.486	214	20	90	0
36	A4	395.437	358.157	20	345.619	0
37	A4	787.447	344.038	20	180	0
44	S1	469.126	369.005	20	90	0
49	S1	469.126	288.161	20	270	0
50	S1	530.663	288.161	20	270	0
51	S1	592.2	288.161	20	270	0
52	S1	653.737	288.161	20	270	0
53	S1	715.274	288.161	20	270	0
62	S1	541.045	369.005	20	90	0
63	S1	611.177	369.005	20	90	0
64	S1	680.949	369.005	20	90	0

Total Quantity: 21

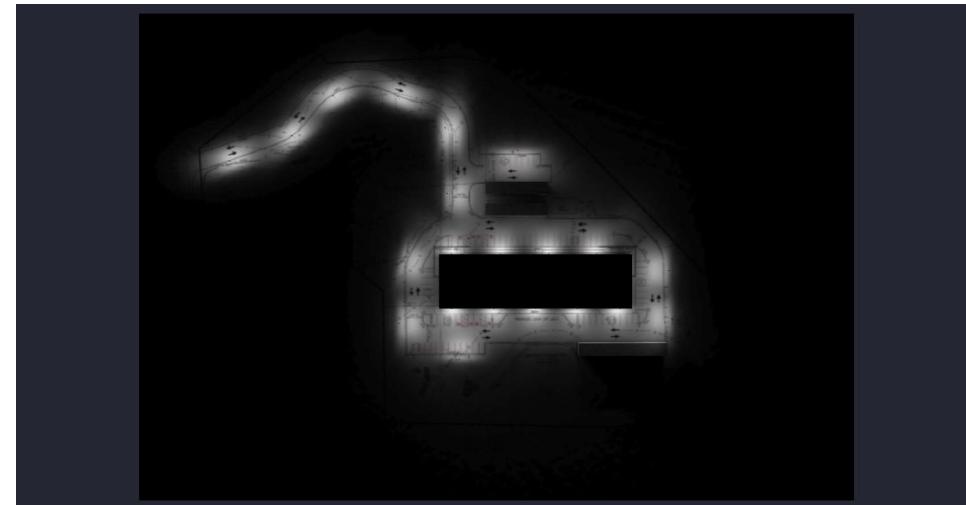

Render Image - Top View

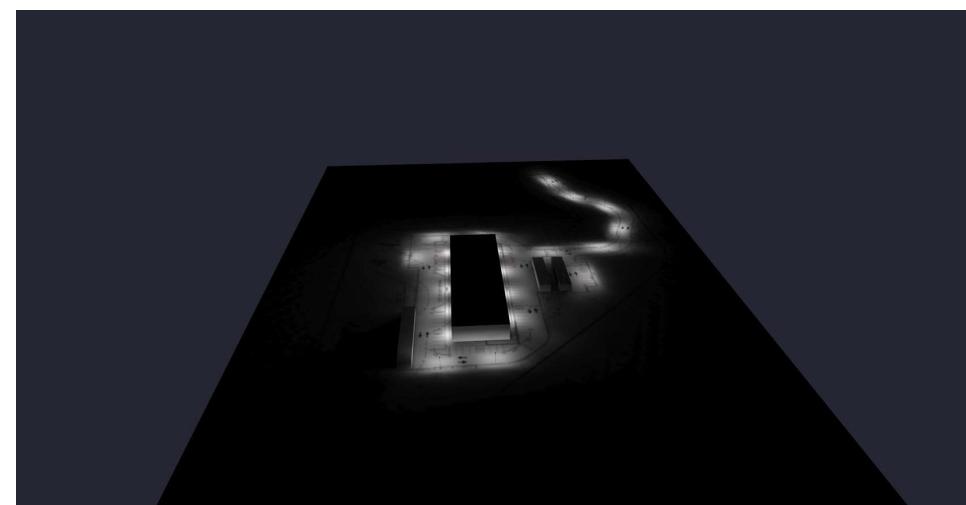

Render Image - Side View

NOTES:

* The light loss factor (LLF) is a product of many variables, only lamp lumen depreciation (LLD) has been applied to the calculated results unless otherwise noted. The LLD is the result (quotient) of mean lumens / initial lumens per lamp manufacturers' specifications.

* Illumination values shown (in footcandles) are the predicted results for planes of calculation either horizontal, vertical or inclined as designated in the calculation summary. Meter orientation is normal to the plane of calculation.

* The calculated results of this lighting simulation represent an anticipated prediction of system performance. Actual measured results may vary from the anticipated performance and are subject to means and methods which are beyond the control of Holbrook-Associated.

* Mounting height determination is job site specific, our lighting simulations assume a mounting height (insertion point of the luminaire symbol) to be taken at the top of the symbol for ceiling mounted luminaires and at the bottom of the symbol for all other luminaire mounting configurations.

* It is the Owner's responsibility to confirm the suitability of the existing or proposed poles and bases to support the proposed fixtures, based on the weight and EPA of the proposed fixtures and the owner's site soil conditions and wind zone. It is recommended that a professional engineer licensed to practice in the state the site is located be engaged to assist in this determination.

* The landscape material shown hereon is conceptual, and is not intended to be an accurate representation of any particular plant, shrub, bush, or tree, as these materials are living objects, and subject to constant change. The conceptual objects shown are for illustrative purposes only. The actual illumination values measured in the field will vary.

* Photometric model elements such as buildings, rooms, plants, furnishings or any architectural details which impact the dispersion of light must be detailed by the customer documents for inclusion in the Holbrook-Associated lighting design model. Holbrook-Associated is not responsible for any inaccuracies caused by incomplete information on the part of the customer, and reserves the right to use best judgement when translating customer requests into photometric studies.

* RAB Lighting Inc. luminaire and product designs are protected under U.S. and International intellectual property laws. Patents issued or pending apply.

HOLBROOK-ASSOCIATED

Prepared By:
Holbrook-Associated
35 Reservoir Park Drive
Rockland, MA 02370

Job Name:
Upton Apartments
Upton, MA

Scale: as noted	Project ID: 216889
Date: 10/18/2023	Rep: AH / SS
Filename: Upton Apartments.AGI	
Drawn By: JHainey	

The Lighting Analysis, ezLayout, Energy Analysis and/or Visual Simulation ("Lighting Design") provided by Holbrook-Associated represent an anticipated prediction of lighting system performance based upon design parameters and information supplied by others. These design parameters and information provided by others have not been field verified and therefore actual measured results may vary from the actual field conditions. Holbrook-Associated recommends that design parameters and other information be field verified to reduce variation.

Holbrook-Associated neither warrants, either implied or stated with regard to actual measured light levels or energy consumption levels as compared to those illustrated by the Lighting Design. Holbrook-Associated neither warrants, either implied or stated, nor represents the appropriateness, completeness or suitability of the Lighting Design intent as compliant with any applicable regulatory code requirements with the exception of those specifically stated on drawings created and submitted by Holbrook-Associated. The Lighting design is issued, in whole or in part, as advisory documents for informational purposes and is not intended for construction nor as being part of a project's construction documentation package.



Color: Bronze

Weight: 16.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	1.25A
208V	0.73A
240V	0.63A
277V	0.55A
Input Watts	76.2/91.8/148.6W

LED Info

Watts	150W
Color Temp	5000K (Cool)
Color Accuracy	85 CRI
L70 Lifespan	100,000 Hours
Lumens	10592/12604/19172 lm
Efficacy	139/137.2/129.1 lm/W

Technical Specifications**Field Adjustability****Field Adjustable (Wattage):**

Field adjustable light output in 3 discrete steps:
Medium Housing: 150W/90W/78W (factory default
150W)

Compliance**UL Listed:**

Suitable for wet locations

IP Rating:

Ingress protection rating of IP66 for dust and water

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-052C34

LED Characteristics**LEDs:**

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

Electrical**Driver:**

78W: Constant Current, Class 2, 120-277V, 50/60 Hz,
120V: 0.65A, 208V: 0.38A, 240V: 0.33A, 277V: 0.29A

90W: Constant Current, Class 2, 120-277V, 50/60 Hz,
120V: 0.75A, 208V: 0.44A, 240V: 0.38A, 277V: 0.33A

150W: Constant Current, Non-Class 2, 120-277V,
50/60 Hz, 120V: 1.25A, 208V: 0.73A, 240V: 0.63A,
277V: 0.55A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

3.66% at 120V, 8.39% at 277V

Power Factor:

100% at 120V, 95.7% at 277V

Surge Protection:

Line to Line: 10kV
Line to Ground: 6kV

Performance**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 400W Metal Halide

Construction**IES Classification:**

The Type II distribution is meant for lighting large areas, located by the roadside. Typically found on wide walkways, on ramps, entrance roadways and bike paths.

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Ambient Temperature :

Max Power Temp Rating: 40°C (104°F)
Middle Power Temp Rating: 52°C (125°F)
Low Power Temp Rating: 54°C (130°F)

Technical Specifications (continued)

Housing:

Die-cast aluminum

Mounting:

Universal mounting arm compatible for hole spacing patterns from 1" to 5 1/2" center to center. Round Pole Adaptor plate included as a standard. Easy slide and lock to mount fixture with ease.

Lens:

Polycarbonate lens

Reflector:

Aluminum reflector with white polycarbonate

Vibration Rating:

3G vibration rating per ANSI C136.31

Effective Projected Area:

EPA = 0.34

Gaskets:

High-temperature silicone gaskets

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Optical

Bug Rating:

BUG Rating 150W: B3 U0 G2

BUG Rating 90W: B3 U0 G2

BUG Rating 78W: B2 U0 G1

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

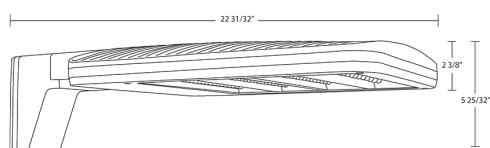

Features

0-10V dimmable standard

IP66 Rated

100,000-Hour LED lifespan

10-Year, No-Compromise Warranty

Ordering Matrix

Family	Housing Size	Distribution	Mounting	Color Temp	Finish	Voltage	Options
ALED	M	2T					

S = Small (80W/60W/40W)
M = Medium (150W/90W/78W)
L = Large (260W/220W/170W)
XL = Extra Large (385W/345W/300W)

2T = Type II
3T = Type III
4T = Type IV
5T = Type V
AT = Auto Dealership Optic

Blank = Universal Pole Mount
SF = Slipfitter
WM = Wall Mount

Blank = 5000K Cool
N = 4000K Neutral
Y = 3000K Warm

Blank = Bronze
W = White
B = Black

Blank = 120-277V, 0-10V Dimming
/480 = 480V, 0-10V Dimming¹

Blank = No Option
/7PR = 7 Pin Twistlock Receptacle
/WS2 = Wattstopper, 20ft lens
/WS4 = Wattstopper, 40ft lens²

¹ 480V available in Medium, Large & Extra Large fixtures only

² Wattstopper option available in Large & Extra Large fixtures only



Color: Bronze

Weight: 16.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	1.25A
208V	0.73A
240V	0.63A
277V	0.55A
Input Watts	76/91.6/148.2W

LED Info

Watts	150W
Color Temp	5000K (Cool)
Color Accuracy	85 CRI
L70 Lifespan	100,000 Hours
Lumens	10603/12617/19192 lm
Efficacy	139.5/137.7/129.5 lm/W

Technical Specifications**Field Adjustability****Field Adjustable (Wattage):**

Field adjustable light output in 3 discrete steps:
Medium Housing: 150W/90W/78W (factory default 150W)

Compliance**UL Listed:**

Suitable for wet locations

IP Rating:

Ingress protection rating of IP66 for dust and water

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-53X76G

LED Characteristics**LEDs:**

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

Electrical**Driver:**

78W: Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.65A, 208V: 0.38A, 240V: 0.33A, 277V: 0.29A

90W: Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.75A, 208V: 0.44A, 240V: 0.38A, 277V: 0.33A

150W: Constant Current, Non-Class 2, 120-277V, 50/60 Hz, 120V: 1.25A, 208V: 0.73A, 240V: 0.63A, 277V: 0.55A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

3.59% at 120V, 8% at 277V

Power Factor:

100% at 120V, 95.7% at 277V

Surge Protection:

Line to Line: 10kV
Line to Ground: 6kV

Performance**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 400W Metal Halide

Construction**IES Classification:**

The Type III distribution is meant to be located near the side of an area, projecting the light outward to fill the area. Ideal for roadways, general parking areas, lighting applications and where a large pool of light is required.

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Ambient Temperature :

Max Power Temp Rating: 40°C (104°F)
Middle Power Temp Rating: 52°C (125°F)
Low Power Temp Rating: 54°C (130°F)

Technical Specifications (continued)

Housing:

Die-cast aluminum

Mounting:

Universal mounting arm compatible for hole spacing patterns from 1" to 5 1/2" center to center. Round Pole Adaptor plate included as a standard. Easy slide and lock to mount fixture with ease.

Lens:

Polycarbonate lens

Reflector:

Aluminum reflector with white polycarbonate

Vibration Rating:

3G vibration rating per ANSI C136.31

Effective Projected Area:

EPA = 0.34

Gaskets:

High-temperature silicone gaskets

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Optical

Bug Rating:

BUG Rating 150W: B2 U0 G3

BUG Rating 90W: B1 U0 G2

BUG Rating 78W: B1 U0 G2

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

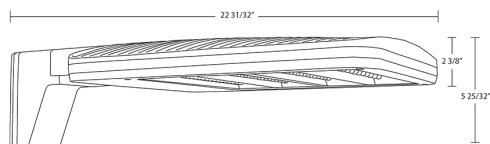

Features

0-10V dimmable standard

IP66 Rated

100,000-Hour LED lifespan

10-Year, No-Compromise Warranty

Ordering Matrix

Family	Housing Size	Distribution	Mounting	Color Temp	Finish	Voltage	Options
ALED	M	3T	Blank = Universal Pole Mount SF = Slipfitter WM = Wall Mount	Blank = 5000K Cool N = 4000K Neutral Y = 3000K Warm	Blank = Bronze W = White B = Black	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming ¹	Blank = No Option /7PR = 7 Pin Twistlock Receptacle /WS2 = Wattstopper, 20ft lens /WS4 = Wattstopper, 40ft lens ²

¹ 480V available in Medium, Large & Extra Large fixtures only² Wattstopper option available in Large & Extra Large fixtures only



Color: Bronze

Weight: 16.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	1.25A
208V	0.73A
240V	0.63A
277V	0.55A
Input Watts	75.2/90.6/146.6W

LED Info

Watts	150W
Color Temp	5000K (Cool)
Color Accuracy	85 CRI
L70 Lifespan	100,000 Hours
Lumens	10610/12625/19204 lm
Efficacy	141.1/139.3/131 lm/W

Technical Specifications**Field Adjustability****Field Adjustable (Wattage):**

Field adjustable light output in 3 discrete steps:
Medium Housing: 150W/90W/78W (factory default
150W)

Compliance**UL Listed:**

Suitable for wet locations

IP Rating:

Ingress protection rating of IP66 for dust and water

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-AH0R16

LED Characteristics**LEDs:**

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

Electrical**Driver:**

78W: Constant Current, Class 2, 120-277V, 50/60 Hz,
120V: 0.65A, 208V: 0.38A, 240V: 0.33A, 277V: 0.29A

90W: Constant Current, Class 2, 120-277V, 50/60 Hz,
120V: 0.75A, 208V: 0.44A, 240V: 0.38A, 277V: 0.33A

150W: Constant Current, Non-Class 2, 120-277V,
50/60 Hz, 120V: 1.25A, 208V: 0.73A, 240V: 0.63A,
277V: 0.55A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

3.67% at 120V, 8.03% at 277V

Power Factor:

100% at 120V, 95.7% at 277V

Surge Protection:

Line to Line: 10kV
Line to Ground: 6kV

Performance**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 400W Metal Halide

Construction**IES Classification:**

The Type IV distribution is especially suited for mounting on the sides of buildings and walls, and for illuminating the perimeter of parking areas. It produces a semicircular distribution with essentially the same candlepower at lateral angles from 90° to 270°.

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Ambient Temperature :

Max Power Temp Rating: 40°C (104°F)
Middle Power Temp Rating: 52°C (125°F)
Low Power Temp Rating: 54°C (130°F)

Technical Specifications (continued)

Housing:

Die-cast aluminum

Mounting:

Universal mounting arm compatible for hole spacing patterns from 1" to 5 1/2" center to center. Round Pole Adaptor plate included as a standard. Easy slide and lock to mount fixture with ease.

Lens:

Polycarbonate lens

Reflector:

Aluminum reflector with white polycarbonate

Vibration Rating:

3G vibration rating per ANSI C136.31

Effective Projected Area:

EPA = 0.34

Gaskets:

High-temperature silicone gaskets

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Optical

Bug Rating:

BUG Rating 150W: B2 U0 G4

BUG Rating 90W: B1 U0 G3

BUG Rating 78W: B1 U0 G3

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

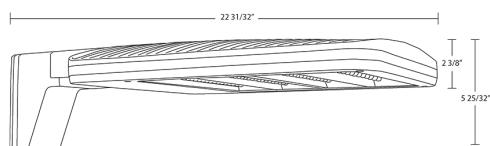

Features

0-10V dimmable standard

IP66 Rated

100,000-Hour LED lifespan

10-Year, No-Compromise Warranty

Ordering Matrix

Family	Housing Size	Distribution	Mounting	Color Temp	Finish	Voltage	Options
ALED	M	4T					

S = Small (80W/60W/40W)
M = Medium (150W/90W/78W)
L = Large (260W/220W/170W)
XL = Extra Large (385W/345W/300W)

2T = Type II
3T = Type III
4T = Type IV
5T = Type V
AT = Auto Dealership Optic

Blank = Universal Pole Mount
SF = Slipfitter
WM = Wall Mount

Blank = 5000K Cool
N = 4000K Neutral
Y = 3000K Warm

Blank = Bronze
W = White
B = Black

Blank = 120-277V, 0-10V Dimming
/480 = 480V, 0-10V Dimming¹

Blank = No Option
/7PR = 7 Pin Twistlock Receptacle
/WS2 = Wattstopper, 20ft lens
/WS4 = Wattstopper, 40ft lens²

¹ 480V available in Medium, Large & Extra Large fixtures only

² Wattstopper option available in Large & Extra Large fixtures only



Square steel poles drilled for 2 Area Lights at 180°. Designed for ground mounting. Poles are stocked nationwide for quick shipment. Protective packaging ensures poles arrive at the job site good as new.

Color: Bronze

Weight: 136.7 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Compliance

CSA Listed:

Suitable for wet locations

Construction

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover

Base Plates:

Slotted base plates 36,000 p.s.i.

Shipping Protection:

All poles are shipped in individual corrugated cartons to prevent finish damage

Color:

Bronze powder coating

Height:

20 ft.

Weight:

137 lbs

Gauge:

11

Wall Thickness:

1/8"

Shaft Size:

4"

Hand Hole Dimensions:

3" x 5"

Bolt Circle:

8 1/2"

Base Dimension:

8"

Anchor Bolt:

Galvanized anchor bolts and galvanized hardware and anchor bolt template. All bolts have a 3" hook.

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available [online](#).

Pre-Shipped Anchor Bolts:

Bolts can be pre-shipped upon request for additional freight charge

Max EPA's/Max Weights:

70MPH 10.7 ft./360 lb.

80MPH 7.0 ft./350 lb.

90MPH 4.3 ft./350 lb.

100MPH 2.5 ft./350 lb.

110MPH 1.1 ft./350 lb.

120MPH 0.1 ft./340lb


Other

Terms of Sale:

Pole Terms of Sale is available [online](#).

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

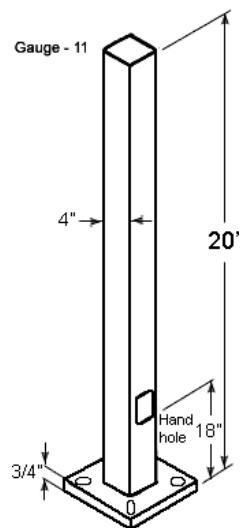Dimensions**Features**

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application



Color: Bronze

Weight: 10.6 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current	Watts	100W
120V	1.00A	Color Temp	3000K/4000K/5000K
208V	0.60A	Color Accuracy	80 CRI
240V	0.50A	L70 Lifespan	100,000 Hours
277V	0.40A	Lumens	12833/14984/13166 lm
Input Watts	102/102.8/101W	Efficacy	125.8/145.8/130.4 lm/W

LED Info**LED Characteristics****LEDs:**

Long-life, high-efficiency, surface-mount LEDs

Electrical**Driver:**

Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 1.00A, 208V: 0.60A, 240V: 0.50A, 277V: 0.40A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Photocell:

120-277V selectable photocell that can be turned on and off.

Construction**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

Ambient Temperature :Max Power Temp Rating: 50°C (122°F)
Middle Power Temp Rating: 50°C (122°F)
Low Power Temp Rating: 50°C (122°F)**Housing:**

Precision die-cast aluminum housing and door frame

Lens:

Polycarbonate lens

Mounting:

Hinged wiring access and conduit entries on the back, sides, top and bottom make installation a snap

Cut Off:

Full cutoff (0°)

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Other**Note:**

All values are typical (tolerance +/- 10%)

5 Yr Limited Warranty:The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.**Technical Specifications****Field Adjustability****Field Adjustable:**

Color temperature selectable by 3000K, 4000K and 5000K

Compliance**UL Listed:**

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLUXLTH1OKVW

Performance**Lifespan:**


100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 400W Metal Halide

Technical Specifications (continued)**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

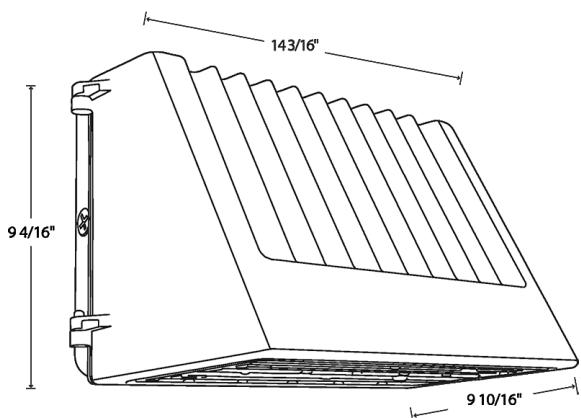Dimensions**Features**

Selectable CCT
Full cutoff
Selectable on/off photocell
0-10V dimming, standard

Ordering Matrix

Family	Style	Wattage
SLIM17FA	FC	100
FC = Full cutoff	100 = 100W	120 = 120W

150 = 150W